




■ CORATRIF

➔ Complete earthing and short-circuiting device

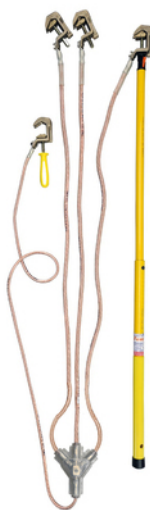

▶ STANDARD(S)

IEC 61230

▶ USE

For fixed ball points, diameters 20 and 25 mm, flat and cylindrical bars.
Suitable for fitting E240 lug barrels.

Document not contractually binding, errors and omissions excepted.



► SPECIFICATIONS

Composition :

- 1 TRIFURCATION as defined in the table
- 3 NBD25AP phase clamps (hexagonal end fittings, 12 mm)
- 1 NBD25M earthing clamp (with ergonomic handle)
- 1 insulating stick TR245APV
- 1 metal storage case CM535

Composition of the CORATRIF08 :

- 1 TRIFURCATION as defined in the table
- 3 NBD25B phase clamps (bayonet end fittings)
- 1 NBD25M earthing clamp (with ergonomic handle)
- 1 insulating stick TR276B
- 1 metal storage case CM535

Composition of the CORATRIFSN :

- Identical to CORATRIF08 without the insulating stick TR276B

Reference	Description	Max. Isc	3 Short-circuiting cables	Earthing cable	Item n° of the corresponding trifurcation
CORATRIF	Complete earthing and short-circuiting device	18,5 kA/1s	70 mm ² - 1.5 m	35 mm ² - 2.0 m	T70015C35020C
CORATRIF01	Complete earthing and short-circuiting device	25 kA/1s	95 mm ² - 0.8 m	95 mm ² - 3.0 m	T95008C95030C
CORATRIF02	Complete earthing and short-circuiting device	18,5 kA/1s	70 mm ² - 0.8 m	35 mm ² - 5.0 m	T70008C35050C
CORATRIF03	Complete earthing and short-circuiting device	18,5 kA/1s	70 mm ² - 0.8 m	35 mm ² - 10 m	T70008C35100C
CORATRIF08	Complete earthing and short-circuiting device	25 kA/1s	95 mm ² - 1.5 m	35 mm ² - 2.5 m	T95015C35025C
CORATRIFSN	Complete earthing and short-circuiting device	25 kA/1s	95 mm ² - 1.5 m	35 mm ² - 2.5 m	T95015C35025C

► TABLE LEGEND

Other compositions and/or trifurcations on request.