




See online
technical sheet

/ CORATRIFO8

Complete earthing and short-circuiting device

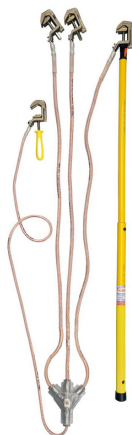

/ Standards

- CEI 61230

/ Advantages

- High clamping capacity
- Fast and easy to use

/ Areas of activity



Electrical distribution



Transport



Industry



Civil security

/ Technical specifications

- Product kind : Dispositif
- Clamp material : Cupro-alu
- Clamp tightening (mm) : Rond : Ø7 à 37mm, Plat : jusqu'à 37mm, Boule : Ø20 et 25mm
- Conductor type : Ball, Round, Flat
- Operating voltage (V) : HTA (1 000 V to 50 000 V)
- Field of use (environment) : Station office
- Short-circuit intensity kA/Is : 25
- Type of trifurcation : T = Trifurcation with PVC coating
- Phase câble
- Phase cable number : 3
- Phase(s) cable cross-section (mm²) : 95
- Phase(s) cable length (m) : 1,5
- Floor cable
- Cross-section (mm²) : 35
- Floor cable length (m) : 2,5
- Measurement : 910x240x105mm

/ Products contained in the kit

	Reference	Designation
	CM535	Empty metal box for earthing device
	NBD25B	Earthing clamp for fixed ball points
	T95015C35025C	Set of cables for short-circuiting and earthing devices
	TR245	Telescopic sticks
	NBD25M	Earthing clamp for fixed ball points