




See online technical sheet

/ CWB/18-60-MVS SERIE



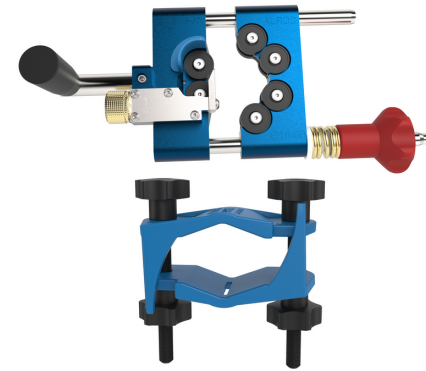



/ Use

CWB/18-60-MVS tools easily remove the non-strippable semiconductor with the creation of a chamfer at the end of the semiconductor and without the use of silicone. The MVS stop is attached to the cable to stop the tool with a large contact surface.

/ Advantages

- No silicon needed
- Cutting depth with 1/10 mm increments
- Smooth finish
- Heavy duty
- Easy to get to grips with

/ Areas of activity

-  Cable & Connections
-  Substation
-  Electrical distribution
-  Industry

/ Technical specifications

- Specific tools : Cable tools
- Cable tools : Cable tools
- Operating voltage (V) : HTA (1 000 V to 50 000 V)
- Packaging : Carton box
- Weight (g) : 900
- Length (mm) : 235
- Width (mm) : 125
- Height (mm) : 90
- Max diameter (mm) : 60
- Mini diameter (mm) : 18
- Cut deepness (mm) : 1.8

Product reference	Cut deepness	Chamfer angle
CWB/18-60-MVS	1.8 mm	13 °
CWB/18-60-MVS-8	1,8 mm	8 °